




Quality on Demand

Triplex Diesel Greensmower

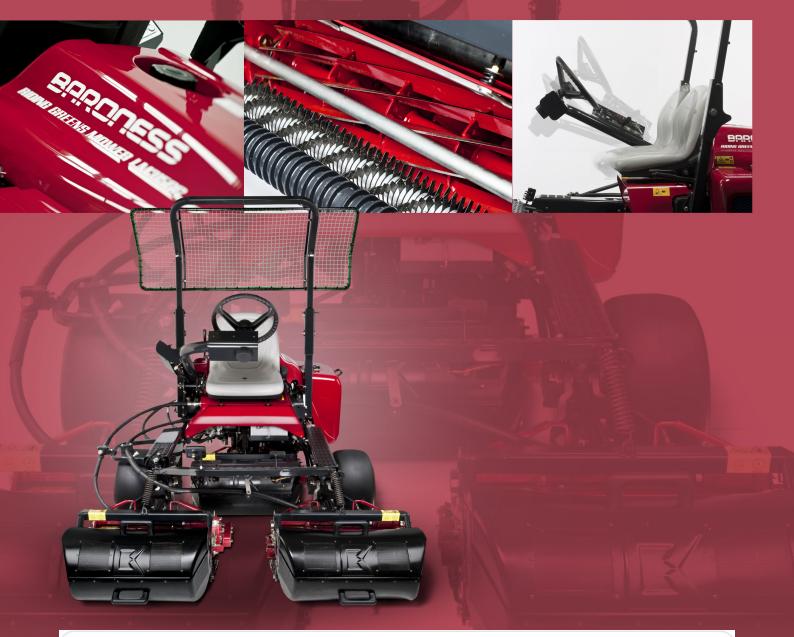

BEVATTNINGSTEKNIK Helsingborgsvägen 578, Varalöv 262 96 ÄNGELHOLM, SWEDEN

Telefon: +46 431 22250

Email: info@bevattningsteknik.se eller philip@bevattningsteknik.se

www.bevattningsteknik.se









The LM315 delivers perfectly mowed greens every time!

Even the most difficult contours are a breeze with the Baroness LM315







The Heart of Baroness

At the heart of every Baroness reelmower is the cutting cylinder and bedknife.

No-one takes more care than Baroness!

Every cutting cylinder is individually balanced before being installed and our heat treatment process ensures that the cutting edges of both our cutting cylinders and bedknives stay sharp and true.

Hi-lift feature

The Baroness LM315 has been designed to get you to every corner of the golf course. It's equally at home on tees, approaches or greens

Moving around the golf course you need to know that the cutting units will stay clear of any obstructions as you travel. That's why we designed in a hi-lift feature to ensure maximum protection for the cutting units during transport.

Maximum comfort

As well as optimising the LM315 for diesel engine power we took the time to make sure that operator comfort was fully addressed too.

An adjustable steering column and seat, together with comfort seat options makes the Baroness LM315 a joy to work on.







The Cutting Unit - the heart of Baroness

The heart of all Baroness reelmowers!

Our cutting units deliver unrivalled quality of cut and contour following ability.

Available in 7, 9 or 11-blade reel options, with bedknife options from 1.5mm to 5mm thickness, we can offer cutting units for all greens, tees and approach mowing needs.

Cable drive to the cutting units eliminates potential hydraulic oil leaks where they occur most.



Cutting unit removal in seconds - no tools needed!







Step 1 - unclip the drive cable

Step 2 - unclip the balljoint

Step 3- slide out the cutting unit

All the options for a complete maintenance system



The Baroness LM315 is not just the finest of reelmowers. It's also a maintenance system!

The cutting units can be fitted with grooming, de-thatching and brush reels which can be run either in the same direction of rotation as the cutting cylinder or in the opposing direction thanks to the unique gear drive setup.





Quality on Demand















SPECIFICATION

MODEL	LM315GC
Length	208 cm
Width	173 cm
Height (to steering wheel)	135 cm
Height (including ROPS)	182 cm
Wheelbase	126 cm
Wheel track - front	126 cm
Weight (incl. all fluids, 3WD and grooming reels fitted)	680 kg
Number of cutting units	3
Cutting unit width	56 cm
Mowing width	152 cm
Mowing height	2 - 29 mm

Drive type	Hydrostatic 2WD
Drive option	3WD
Steering	Hyd. Power steering
Engine	Kubota D722, 21hp 3-cylinder
Speed - transport	15 km/h 2WD, 9km/h 3WD
Speed - cutting	Max. 6km/h
Cuts per metre (High setting)	246 @ 5 km/h (11-blade unit)
Cuts per metre (Low setting)	160 @ 5 km/h (11-blade unit)
Reel drive	Electric clutch and cable
Fuel Tank capacity	20 litres
Hyd. Oil tank capacity	16 litres
Tyre size - front	18 x 9.50 - 8
Tyre size - rear	18 x 9.50 - 8

Specifications may be subject to change without notice

Postadress:

TRÄDGÅRDSTEKNIK AB Helsingborgsvägen 578, Varalöv 262 96 ÄNGELHOLM Telefon: 0431-222 90 Bg.nr: 5743-7980 Org.nr: 556409-6120

URL:

www.tradgardsteknik.se

E-postadress:

info@tradgardsteknik.se